

HYDROCARBON MACHINE

TKS

HARD Mounted Lines



211 HM S

215 HM S

Multisolvent versions




TK

HYDROCARBON MACHINE

HARD Mounted Lines



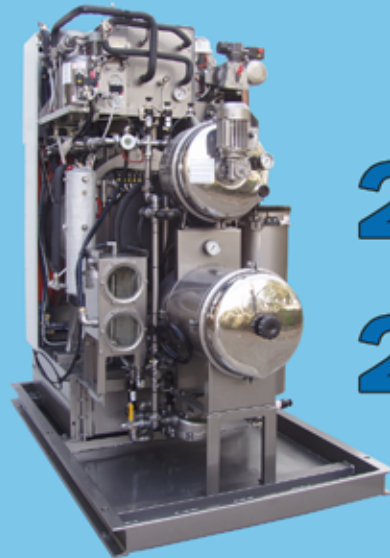

Multisolvent versions



211 HM S

215 HM S

DATI TECNICI - TECHNICAL DATA - DONNEES TECHNIQUES

|  |  |  | TK HM S | | |  | TK HM S | | |
|---|---|---|-----------------|--------|--------|---|---------|--------|--------|
| | | | | 211 | 215 | | 211 | 215 | |
| Portata per carica | Capacité par cycle | Capacidad | kg | 11 | 15 | Load capacity | lb. | 26 | 35 |
| Diametro | Diamètre | Diámetro | mm | 725 | 850 | Diameter | in. | 28.5 | 33.6 |
| Profondità | Profondeur | Profundidad | mm | 533 | 533 | Depth | in. | 21 | 21 |
| Volume | Volume | Volumen | dm ³ | 220 | 300 | Volume | cu.ft. | 7.8 | 10.7 |
| Velocità lavaggio | Vitesse de lavage | Velocidad lavado | g/l' | 45 | 45 | Wash speed | r.p.m. | 45 | 45 |
| Velocità Centrifuga | Vitesse d'essorage | Velocidad centrifuga | g/l' | 500 | 500 | Extract speed | r.p.m. | 500 | 500 |
| Diametro oblò | Diamètre hublot | Diámetro puerta de carga | mm | 510 | 510 | Door diameter | in. | 20 | 20 |
| Capacità filtri: | Capacité filtres: | Capacidad filtros: | | | | Filter capacity: | | | |
| Filtro nylon/Eco. | Filtre Nylon/Eco. | Filtro Nylon/Eco. | m ² | 2.4 | 4 | Nylon filter/Eco. | sq.ft. | 22 | 40 |
| Filtro decolorante | Filtre Décolorant | Filtro decolorante | N° | 1 | 1 | Decolorating filter | N° | 1 | 1 |
| Filtro cartuccia | Filtre cartouches | Filtro cartucha | N° | 2x 1/2 | 2x 1/2 | Carttridge filter | N° | 2x 1/2 | 2x 1/2 |
| 1° Serbatoio | 1° Réservoir | 1° depósito | lt | 110 | 150 | 1st Tank | US.gals | 29 | 39.6 |
| 2° Serbatoio | 2° Réservoir | 2° depósito | lt | 70 | 150 | 2nd Tank | US.gals | 18.5 | 39.6 |
| Motori: | Moteurs: | Motores: | | | | Motors: | | | |
| Lavaggio/Centrifuga | Lavage/Essorage | Lavado/Centrifuga | kw | 1.1 | 1.5 | Wash/Extract | kw | 1.1 | 1.5 |
| Ventilatore | Ventilateur | Ventilador | kw | 0.75 | 1.5 | Fan | kw | 0.75 | 1.5 |
| Pompa | Pompe | Bomba | kw | 0.55 | 1.1 | Pump | kw | 0.55 | 1.1 |
| Filtro | Filtre | Filtro | kw | 0.25 | 0.33 | Filter | kw | 0.25 | 0.33 |
| Gruppo frigo | Groupe Frigo | Grupo frigo | kw | 2.6 | 2.6 | Refrigerating unit | kw | 2.6 | 2.6 |
| Misure ingombro: | Dimensions: | Medidas: | | | | Dimensions: | | | |
| Larghezza | Largeur | Ancho | mm | 1010 | 1200 | Width | in. | 39.7 | 47.3 |
| Profondità | Profondeur | Profundidad | mm | 1500 | 2150 | Depth | in. | 59 | 85 |
| Altezza | Hauteur | Altura | mm | 1960 | 1230 | Height | in. | 77.2 | 83.8 |
| Potenza impiegata: | Puissance employée: | Potencia empleada: | | | | Installed power: | | | |
| Versione vapore | Version vapeur | Versión vapor | kw | 4.2 | 6.5 | Steam model | kw | 4.2 | 6.5 |
| Versione elettrica | Version électrique | Versión eléctrica | kw | 7 | 12 | Electric model | kw | 7 | 12 |
| Peso | Poids | Peso | kg | 940 | 1200 | Weight | lb. | 2068 | 2640 |
| Ingresso acqua | Entrée eau | Entrada agua | Ø | ½" | ½" | Water inlet | Ø | ½" | ½" |
| Pressione acqua | Pression eau | Presión agua | bar | 1.5 | 1.5 | Water pressure | p.s.i. | 21.5 | 21.5 |
| Ingresso vapore | Entrée vapeur | Entrada vapor | Ø | ½" | ½" | Steam supply | Ø | ½" | ½" |
| Pressione vapore | Pression vapeur | Presión vapor | bar | 4.5 | 4.5 | Steam pressure | p.s.i. | 64 | 64 |

Descrizioni, dati, misure, colori non sono impegnativi e possono variare senza alcun preavviso - Descriptions, weights, measurements, pictures are not binding - Descriptions, poids, mesures, figures et couleurs sont donnés sans engagement de notre part - Descripción, datos, medidas y colores se facilitan sin compromiso y pueden ser variados sin previo aviso.



TEKNOZEN S.r.l.

Zona Industriale Nord - 06012 Città di Castello (PG) - ITALY

Tel. +39 0758558338 - Fax +39 0758520717

www.teknozen.it - Email: teknozen@teknozen.it